

Photon detection for tomorrow's cutting-edge applications.



**EXCELITAS**  
TECHNOLOGIES®

1. NEG  
2. POS

# Making Your World Safer & More Secure.

At Excelitas we are sensing what you need for a safer and innovative tomorrow. From Silicon Photodiodes to InGaAs Photodiodes, Laser detection modules and Pulsed Laser Diodes, Mil Standard and Space Qualified Modules, our Defense & Aerospace Sensors Technologies are addressing your high-performance and high volume applications. You can rely on our world-class design, manufacturing and R&D facility in Montreal, Canada, with integrated wafer fab, assembly and test operation all at the same location.

## ■ SECTION 1 • AVALANCHE PHOTODIODES

- Silicon APDs
- InGaAs APDs

## ■ SECTION 2 • PIN PHOTODIODES

- Silicon PIN Photodiodes
- InGaAs PIN Photodiodes

## ■ SECTION 3 • YAG AND QUADRANT DETECTORS

## ■ SECTION 4 • OPTICAL RECEIVERS

- Silicon Optical Receivers
- InGaAs Optical Receivers

## ■ SECTION 5 • PULSED LASER DIODES

- 905 nm Pulsed Laser Diodes
- 1550 nm Pulsed Laser Diodes

## ■ SECTION 6 • EXACTD-332 OR 362, DETECTORS FOR LASER WARNING SYSTEMS

## ■ SECTION 7 • DEFENSE AND AEROSPACE SOLUTIONS

## ■ SECTION 8 • PHOTON DETECTION SOLUTIONS

### Our Sensors Solutions enable:

#### Defense Electronics/Optronics Systems

- Laser Range Finder (LRF)
- Target Designator
- LiDAR and LADAR
- Laser Scanning
- Obstacle Avoidance Scanner
- Laser Warning Systems (LWS)
- Training and Simulation

#### Next Generation Smart Munitions

- Laser Proximity Fuze
- Height of Burst Sensor
- Semi-Active Laser Seeker (SAL)
- Laser Beam Rider Transmitter
- Laser Beam Rider Receiver
- Altimeter

#### IMPORTANT NOTE

This catalog presents only standard products. Please contact Excelitas with your requirements to have your product designed to your specification. We have the ability to customize our products to match customer-specific requirements.

SECTION 1

Avalanche Photodiodes

4

SECTION 2

PIN Photodiodes

11

SECTION 3

YAG and Quadrant Detectors

13

SECTION 4

Optical Receivers

15

SECTION 5

Pulsed Laser Diodes

17

SECTION 6

EXACTD-332 or 362, Detectors for Laser Warning Systems

20

SECTION 7

Defense and Aerospace Solutions

21

SECTION 8


Photon Detection Solutions

22

# Avalanche Photodiodes APD

AVALANCHE PHOTODIODES ■

Avalanche Photodiodes  
Silicon APDs

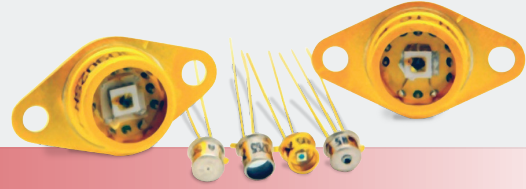

## Silicon APDs

### Applications

- Laser Range Finder
- Target Designator
- Munitions Laser Guidance
- Laser Altimeter
- Laser Scanning
- LiDAR and LADAR
- Laser Alert
- Training & Simulation

### Features and Benefits

- Low noise
- High gain
- High quantum efficiency
- Built-in TE-cooler option
- Various optical input options
- Customization available upon request

### Product Description

These rear entry "reach-through" silicon APDs offer the best compromise in terms of cost and performance for applications requiring high speed and low noise photon detection from 400 nm up to 1100 nm. They feature low noise, high quantum efficiency and high gain while maintaining reasonably low operating voltage. The active area varies from 0.5 mm to 3 mm to accommodate a large variety of applications.

The "S" series of the C30902 family of APDs can be used in either their normal linear mode ( $V_R < V_{BR}$ ) or in their Geiger mode ( $V_R > V_{BR}$ ) as a photon counters. This series is particularly well-suited for ultra-sensitive photon measurements. Precise temperature control can be achieved with a thermo-electric cooler which can be used to improve noise and responsivity or to maintain constant responsivity over a wide range of ambient temperature.

These APDs can also be incorporated into a hermetically-sealed TO-8 package with ultra-low noise preamplifier (C30659 series APD receivers) and thermo-electric cooler (LLAM series receivers) for optimum signal to noise performance. See page 15 for more information.

### Technical Specification

#### Avalanche Photodiodes – Silicon APDs

Unit	Active Diameter mm	Capacitance pF	Rise/Fall Time ns	Dark Current nA	Breakdown Voltage min V	Breakdown Voltage max V	Temp. Coefficient V/°C	Typical Gain	Responsivity 830 nm A/W	Responsivity 900 nm A/W	Responsivity 1060 nm A/W	NEP fW/√Hz	Package
C30817EH	0.8	2	2	50	300	475	2.2	120	-	75	-	1	TO-5
C30884E	0.8	4	1	100	190	290	1.1	100	-	63	8	13	TO-5
C30902BH	0.5	1.6	0.5	15	185	265	0.7	150	77	60	-	3	Ball lens TO-18
C30902EH	0.5	1.6	0.5	15	185	265	0.7	150	77	60	-	3	TO-18, flat window
C30902EH-2	0.5	1.6	0.5	15	185	265	0.7	150	77	60	-	3	TO-18, built-in 905 nm filter
C30902SH	0.5	1.6	0.5	15	185	265	0.7	250	128	108	-	0.9	TO-18, flat window
C30902SH-2	0.5	1.6	0.5	15	185	265	0.7	250	128	108	-	0.9	TO-18, built-in 905 nm filter
C30916EH	1.5	3	3	100	315	490	2.2	80	-	50	12	20	TO-5
C30921EH	0.25	1.6	0.5	15	185	265	0.7	150	77	60	-	3	TO-18, flat window
C30921SH	0.25	1.6	0.5	15	185	265	0.7	250	128	108	-	0.9	TO-18, light pipe
C30954EH	0.8	2	2	50	300	475	2.4	120	-	75	36	13	TO-5
C30955EH	1.5	3	2	100	315	490	2.4	100	-	70	34	14	TO-5
C30956EH	3	10	2	100	325	500	2.4	75	-	45	25	25	TO-8



Product Table

**Silicon APD – TE-Cooled**

Unit	Active Diameter	Active Area	Total Capacitance	Rise/Fall Time	Dark Current	Breakdown Voltage min	Breakdown Voltage max	Temperature Coefficient	Typical Gain	Responsivity 830 nm	Responsivity 900 nm	Responsivity 1060 nm	Noise Current	Package
	mm	mm <sup>2</sup>	pF	ns	nA	V	V			A/W	A/W	A/W	pA / $\sqrt{\text{Hz}}$	
<b>C30902SH-TC</b>	0.5	0.2	1.6	0.5	2	225	-	0.7	250	128	108	-	0.04	TO-66 flange
<b>C30902SH-DTC</b>	0.5	0.2	1.6	0.5	1	225	-	0.7	250	128	108	-	0.02	TO-66 flange
<b>C30954EH-TC</b>	0.8	0.5	2	2	50	300	475	2.4	120	-	75	-	0.2	TO-66 flange
<b>C30955EH-TC</b>	1.5	1.8	3	2	100	315	490	2.4	100	-	70	-	0.2	TO-66 flange
<b>C30956EH-TC</b>	3	7	10	2	100	325	500	2.4	75	-	45	-	0.2	TO-66 flange

NOTE: TC stands for single stage cooler, operating temperature 0° C  
NOTE: DTC stands for double stage cooler, operating temperature -20° C

Figure 1

**TO-66 Flange\***




Figure 2

**TO-5 Package\***

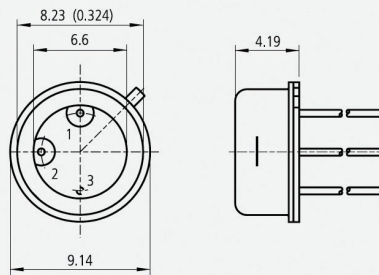


Figure 3

**TO-8 Package\***

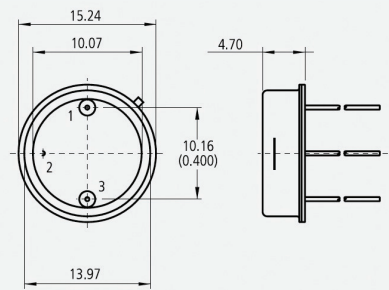


Figure 4

**TO-18 Package\***

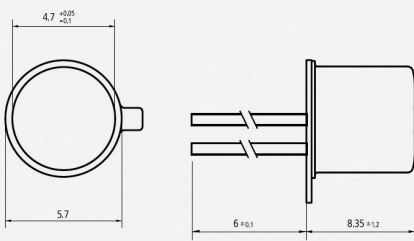


Figure 5

**Ball Lens TO-18\***

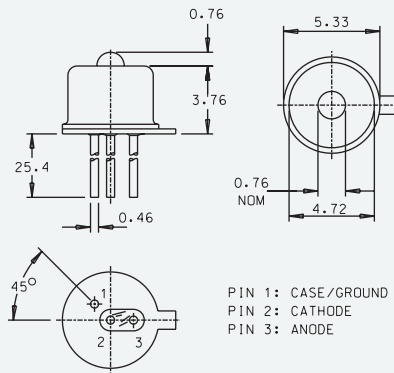


Figure 6

**TO-18 Built-in 905 nm Filter\***


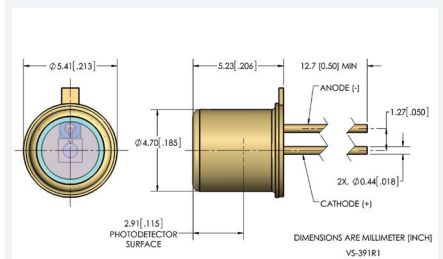


Figure 7

**TO-18 Light Pipe\***

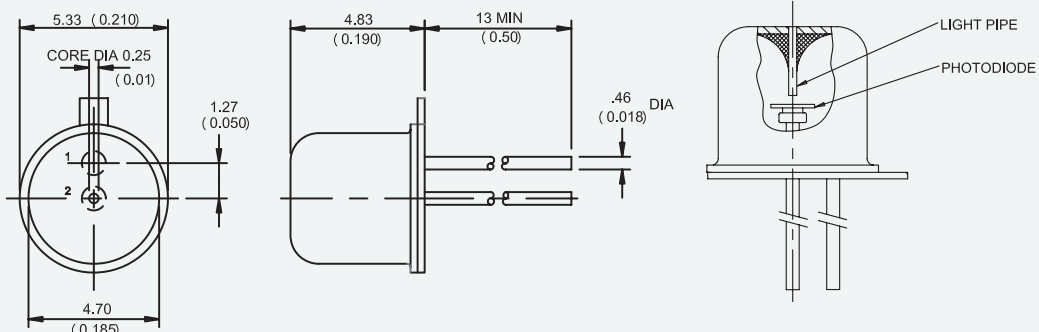


\*Note: Package dimensions for indication only. Exact package dimensions can be found on products datasheets.

# Avalanche Photodiodes

## Multi-Elements

### AVALANCHE PHOTODIODES ■

Avalanche Photodiodes  
Si APD Arrays and Quadrants

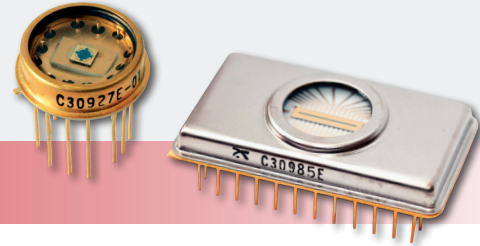

## Si APD Arrays and Quadrants

### Applications

- Laser Spot Tracking
- Triangulation
- Interferences Fringes
- Interferometry
- Position Sensing
- Munitions Guidance

### Features and Benefits

- High quantum efficiency
- Hermetically-sealed packages
- Monolithic chip with minimal dead space between elements
- Specific tailored wavelength response
- RoHS compliant
- Customization available upon request

### Product Description

The C30927 series of quadrant Si Avalanche Photodiode and the C30985E multi-element APD array utilize the double-diffused "reach-through" structure, which provides ultra high sensitivity. The C30927 quadrant structure has a common avalanche junction, with separation of the quadrants achieved by segmentation of the light entry p+ surface opposite the junction. With this design, there is no dead space between the elements and therefore no loss of response at boresight.

The C30985E is a 25 element monolithic linear APD array having a high inter-electrode resistance with small dead space between the elements. The package has a common ground and bias with a separate lead for each element output.

The C30927 series of quadrant Si Avalanche Photodiode and the C30985E multi-element APD array utilize the double-diffused "reach-through" structure, which provides ultra-high sensitivity. Based on a common avalanche junction, with separation of the quadrants achieved by segmentation of the light entry p+ surface opposite the junction. With this design, there is no dead space between the elements and therefore no loss of response at boresight.

### Product Table

## Avalanche Photodiodes – Si APD Arrays

Part Number	Number of Elements	Photo Sensitive Area	Responsivity	Dark Current per Element	Spectral Noise Current	Capacitance @ 100 KHz	Response Time	NEP	Vop
Unit	mm	mm	A/W	nA	pA/√Hz	pF	ns	fW/√Hz	V
C30927EH-01	4	1.5 $\emptyset$	15 @ 1064 nm	25	0.5	1	3	33 @ 1064 nm	275 - 425
C30927EH-02	4	1.5 $\emptyset$	62 @ 900 nm	25	0.5	1	3	16 @ 900 nm	275 - 425
C30927EH-03	4	1.5 $\emptyset$	55 @ 800 nm	25	0.5	1	3	9 @ 800 nm	275 - 425
C30985E	25	7.5 x 0.3 (75 $\mu$ m dead space)	31 @ 900 nm	1	0.1	0.5	2	3 @ 900 nm	250 - 425

Figure 1

### C30927 Series\*


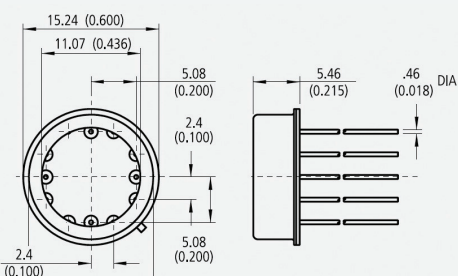


Figure 2

### C30985E\*

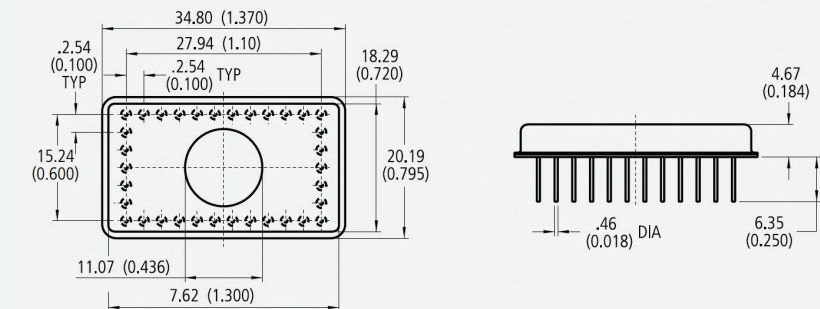


\*Note: Package dimensions for indication only. Exact package dimensions can be found on products datasheets.

# Avalanche Photodiodes

## Optimized for YAG

AVALANCHE PHOTODIODES ■

Avalanche Photodiodes  
1060 nm NIR Enhanced Si APDs

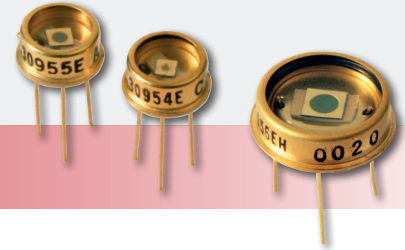

## 1064 nm NIR Enhanced Si APDs

### Applications

- Range Finding
- LiDAR (Light Detection And Ranging)
- YAG Laser Detection
- Target Designator

### Features and Benefits

- High quantum efficiency at 1064 nm
- Fast response time
- Wide operating temperature range
- Low capacitance
- Hermetically-sealed packages
- RoHS compliant
- Customization available upon request

### Product Description

The C30954EH, C30955EH, and C30956EH are general purpose silicon avalanche photodiodes made using a double-diffused "reach-through" structure. The design of these photodiodes is such that their long wave response (i.e. >900 nm) has been enhanced and these APDs have of up to 40% quantum efficiency at 1064 nm. At the same time, the diodes retain the low noise, low capacitance, and fast rise and fall times characteristics of the "reach-through" structure. To help simplify many design needs, these APDs are also available in Excelitas' high-performance hybrid preamplifier module type C30659 series, as well as the preamplifier and TE cooler incorporated module type LLAM series. In addition, these APDs are also available with built-in thermo-electric cooler for easier temperature control. Please refer to Page 15 in this catalog.

Product Table

### Si APDs – NIR Enhanced

Part Number	Photo Sensitive Diameter	Respon-sivity @ 1064 nm	Dark Current	Spectral Noise Current	Capacitance @ 100 KHz	Response Time	NEP @ 1060 nm	Vop Range
Unit	mm	A/W	nA	pA/√Hz	pF	ns	fW/√Hz	V
<b>C30954EH</b>	0.8	36	50	0.5	2	2	14	275 - 425
<b>C30955EH</b>	1.5	34	100	0.5	3	2	15	275 - 425
<b>C30956EH</b>	3.0	25	100	0.5	10	2	20	275 - 425

Product Table

### Silicon APD – TE-Cooled

Unit	Active Diameter	Active Area	Total Capacitance	Rise/Fall Time	Dark Current	Breakdown Voltage min	Breakdown Voltage max	Temperature Coefficient	Typical Gain	Responsivity 830 nm	Responsivity 900 nm	Responsivity 1060 nm	Noise Current	Package
Unit	mm	mm <sup>2</sup>	pF	ns	nA	V	V			A/W	A/W	A/W	pA/√Hz	
<b>C30954EH-TC</b>	0.8	0.5	2	2	50	300	475	2.4	120	-	75	-	0.2	TO-66 flange
<b>C30955EH-TC</b>	1.5	1.8	3	2	100	315	490	2.4	100	-	70	-	0.2	TO-66 flange
<b>C30956EH-TC</b>	3	7	10	2	100	325	500	2.4	75	-	45	-	0.2	TO-66 flange

TC stands for single stage cooler, operating temperature 0°C. See page 5 for TO-66 flange package drawing.

Graph 1

### Spectral Responsivity Characteristics

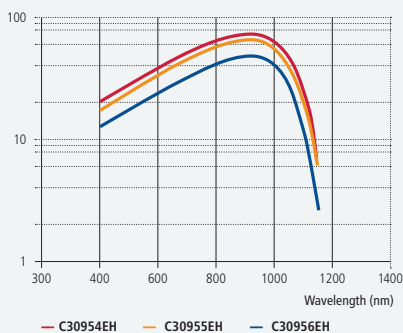


Figure 1

### C30954EH, C30955EH\*


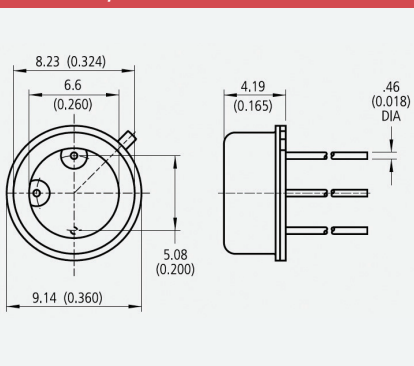


Figure 2

### C30956EH\*

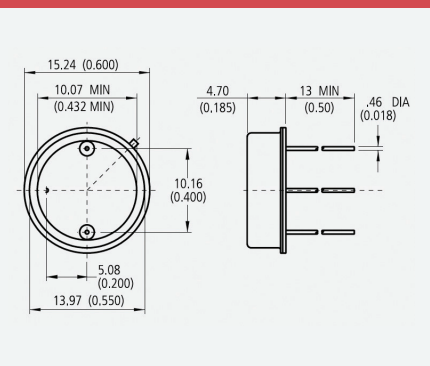


\*Note: Package dimensions for indication only. Exact package dimensions can be found on products datasheets.

# Avalanche Photodiode

## AVALANCHE PHOTODIODES ■

Large Area Si-APDs – UV-Enhanced APDs



## Large Area Si-APDs – UV-Enhanced APDs

### Applications

- Nuclear Medicine
- Fluorescence Detection
- High Energy Physics
- Medical Imaging
- Radiation Detection
- Particle Physics
- Instrumentation
- Environmental Monitoring

### Features and Benefits

- High quantum efficiency
- Low dark currents
- Easy coupling to scintillator crystals
- Immunity to electromagnetic fields
- Custom packaging available
- Excellent timing resolution
- RoHS compliant
- Customization available upon request

### Product Description

The C30739ECERH Silicon Avalanche Photodiode (APD) is intended for use in a wide variety of broadband low light level applications covering the spectral range from below 400 to over 700 nanometers. It has low noise, low capacitance and high gain. It is designed to have an enhanced short wavelength sensitivity, with quantum efficiency of 60 % at 430 nm.


The standard ceramic carrier package allows for easy handling and coupling to scintillating crystals such as LSO and BGO. Combined with the superior short wavelength responsivity, it makes this APD ideal in demanding applications such as Positron Emission Tomography (PET).

The C30626FH and C30703FH series are large area Si APDs in flat pack packages for either direct detection or easy coupling to scintillator crystals.

The C30626 uses a standard reach through structure and has peak detection at about 900 nm. The C30703 is enhanced for blue wavelength response and has peak quantum efficiency at ~ 530 nm. These APDs are packaged in a square flat pack, with or without windows, or on ceramics. The no-window devices can detect direct radiation of X-rays and electrons at the energies listed, and the windowed packages are best for easy scintillator coupling.


Graph 1

### Quantum Efficiency vs. Wavelength

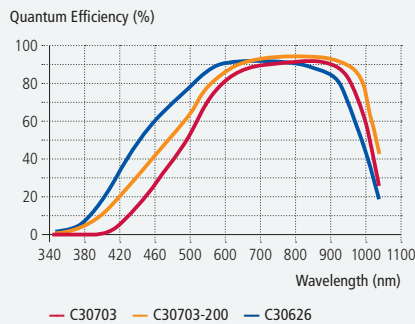

Graph 2

### Quantum Efficiency vs. Wavelength

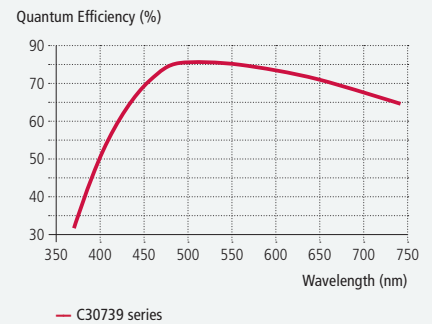

Product Table

### Large Area Si-APDs – UV-Enhanced APDs


Part Number	Photo Sensitive Diameter	Responsivity	Dark Current	Spectral Noise Current	Capacitance @ 100 KHz	Response Time	NEP	Vop Range
Unit	mm	A/W	nA	pA/√Hz	pF	ns	fW/√Hz	V
C30626FH	5 x 5	22 @ 900 nm	250	0.5	30	5	23 @ 900 nm	275 - 425
C30703FH	10 x 10	16 @ 530 nm	10	0.7	100	5	40 @ 530 nm	275 - 425
C30703FH-200	10 x 10	16 @ 530 nm	10	0.7	60	5	40 @ 530 nm	275 - 425
C30739ECERH	5.6 x 5.6	20 @ 430 nm	50	1.4	60	2	-	275 - 425
C30739ECERH-2	5.6 x 5.6	52 @ 430 nm	50	2	60	2	-	275 - 425



# Avalanche Photodiodes

AVALANCHE PHOTODIODES ■

Left: C30737CH Series  
Center: C30737LH Series  
Right: C30737PH Series

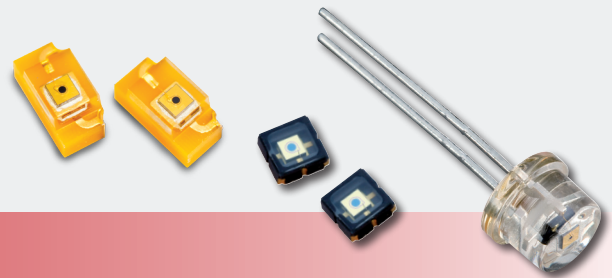

## C30737 High Speed, Low Voltage APD

### Applications

- Laser Range Finding 600 to 950 nm
- Training & Simulation
- Height of Burst
- Laser Proximity Sensor

### Features and Benefits

- Optimized versions for peak responsivity at 900 nm or high bandwidth operation
- Standard versions with 500 and 230  $\mu\text{m}$  active diameter
- Various package types: hermetic TO, plastic TO, SMD top-and side-looking
- High gain at low bias voltage
- Low breakdown voltage
- Fast response,  $t_R \sim 300$  ps
- Low noise, in  $\sim 0.2$  pA/ $\sqrt{\text{Hz}}$
- RoHS compliant
- Customization available upon request

### Product Description

The Excelitas C30737 series silicon APDs provide high responsivity between 500 nm and 1000 nm as well as extremely fast rise times at all wavelengths, with a frequency response above 1 GHz for bandwidth-optimised versions. The C30724, as a low gain APD, can be operated at a fixed voltage without the need for temperature compensation.

Standard versions of the 737 are available in three active area sizes: 0.23, 0.3 and 0.5 mm diameter. They are offered in the traditional hermetic TO housing ("E"), in cost-effective plastic through-hole T-1 $\frac{3}{4}$  (TO-like, "P") packages, in leadless ceramic carrier (LCC, "L") top-looking package and laminated leadless ceramic (LLC, "C") side-looking package for surface mount use. All listed varieties are ideally suited for high-volume, low cost applications.

Customization of these APDs is offered to meet your design challenges. Operating voltage selection and binning or specific wavelength filtering options are among many of the application-specific solutions available.

Product Table

### C30737 Epitaxial Silicon APD – C30724 Low-Gain APD

Part Number	Package	Optical Bandpass Filter design	Active Area Diam. design	Peak Sensitivity Wavelength		Breakdown Voltage		Temp. Coeff. Of $V_{OP}$ , for Constant M	Gain@ $\lambda_{peak}$	Responsivity @ $\lambda_{peak}$	Total Dark Current (Bulk + Surface)		Noise Current, (f = 10 kHz, $\Delta f = 1$ Hz)	Capacitance	Rise & Fall Time, (RL = 50 $\Omega$ , 10% - 90% - 10% Points)
				typ	min	max	typ				typ	typ			
Unit		design	design	$\lambda_{peak}$	$V_{BR}$	$V_{BR}$		typ	typ	typ	max	typ	typ	typ	typ
		nm	$\mu\text{m}$	nm	V	V	V/ $^{\circ}\text{C}$	M	M	nA	nA	pA/ $\sqrt{\text{Hz}}$	pF	ns	
C30724EH	TO	-	500	920	-	350	-	15	8.5	20	40	0.1	1.0	5	
C30724PH	T-1 $\frac{3}{4}$	-	500	920	-	350	-	15	8.5	20	40	0.1	1.0	5	
C30737EH-230-80	TO	-	230	800	120	200	0.5	100	50	0.05	0.5	0.1	1.0	0.2	
C30737PH-230-80	T-1 $\frac{3}{4}$	-	230	800	120	200	0.5	100	50	0.05	0.5	0.1	1.0	0.2	
C30737LH-230-80	LCC	-	230	800	120	200	0.5	100	50	0.05	0.5	0.1	1.0	0.2	
C30737LH-230-81	LCC	635	230	635	120	200	0.5	100	35	0.05	0.5	0.1	1.0	0.2	
C03737LH-230-83	LCC	650	230	650	120	200	0.5	100	35	0.05	0.5	0.1	1.0	0.2	
C30737CH-230-80	LLC	-	230	800	120	200	0.5	100	50	0.05	0.5	0.1	1.0	0.2	
For the remaining 737 family APDs only a generic package and filter part number will be shown, to show the different APD chip characteristics, please contact us for more information.															
C30737XH-300-7X	LLC, LCC	635, 650	300	800	110	160	-	100	50	0.1	1	0.1	0.7	0.5	
C30737XH-500-8X	all	635, 650	500	800	120	200	0.5	100	50	0.1	1	0.1	2.0	0.9	
C30737XH-230-9X	all	905	230	900	180	260	1.3	100	60	0.05	0.5	0.1	0.6	0.9	
C30737XH-500-9X	all	905	500	900	180	260	1.3	100	60	0.1	1	0.1	1.0	0.9	

Electrical Characteristics at  $T_{Ambient} = 22^{\circ}\text{C}$ ; at operating voltage,  $V_{OP}$

# Avalanche Photodiodes

For Eye-Safe Laser Ranging

AVALANCHE PHOTODIODES ■

Avalanche Photodiodes  
Silicon InGaAs APDs



## InGaAs APDs

### Applications

- Eye-safe Laser Range Finding
- Optical Time-Domain Reflectometer (OTDR)
- Optical Communication Systems
- 1550 nm, Eye-safe, LiDAR/LADAR

### Features and Benefits

- Low noise
- High gain and quantum efficiency (QE)
- Built-in TE-cooler option
- Various optical input options
- Customization available upon request

### Product Description

The C30644, C30645 and C30662 Series APDs are high speed, large area InGaAs/InP avalanche photodiodes. These devices provide large quantum efficiency, (QE), high responsivity and low noise in the spectral range between 1100 nm and 1700 nm, with standard active areas up to 200  $\mu\text{m}$  in diameter. They are optimized for use at a wavelength of 1550 nm, ideally suitable for use in eye-safe laser range finding systems.

These APDs can be supplied in a hermetically-sealed TO-18 package, with the chip mounted close to the window to allow easy interfacing with the optical system, on a ceramic carrier or on an SMD in leadless ceramic carrier (LCC). The C30645 and C30662 series APD are offered in the C30659 series of APD receivers with low noise transimpedance amplifier, as well as built-in thermo-electric cooler (the LLAM series). For these modules, refer to page 15 of this catalog. Other custom packages are also available on request.

Figure 1

### Ceramic Carrier\*




Figure 2

### TO-18 Package\*


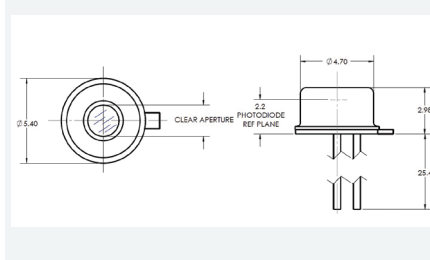


Figure 3

### SMD LCC Package\*



\*Note: Package dimensions for indication only. Exact package dimensions can be found on products datasheets.


### Product Table

### InGaAs APD

Unit	Active Diameter	Capacitance	B <sub>w</sub>	Dark Current	Breakdown Voltage min	Breakdown Voltage max	Temperature Coefficient	Typical Gain	Responsivity 1550 nm	NEP	RoHS	Package
	$\mu\text{m}$	pF	MHz	nA	V	V	V/°C		A/W	fW/√Hz	Compliance	
C30733EH-1	30	0.5	3000	0.5	45	70	0.14	40	37.6	15	Yes	TO-18
C30645ECERH	80	1.25	>1000	3	45	70	0.14	10	9.3	25	Yes	Ceramic carrier
C30645EH	80	1.25	>1000	3	45	70	0.14	10	9.3	25	Yes	TO-18, Small aperture, Silicon
C30645EH-1	80	1.25	>1000	3	45	70	0.14	10	9.3	25	Yes	TO-18, Large aperture, Glass
C30645L	80	1.25	>1000	3	45	70	0.14	10	9.3	25	Yes	SMD LLC
C30662ECERH	200	2.5	850	45	45	70	0.14	10	9.3	75	Yes	Ceramic carrier
C30662ECERH-1	200	2.5	850	45	45	70	0.14	10	9.3	75	Yes	Ceramic carrier
C30662E	200	2.5	850	45	45	70	0.14	10	9.3	75	No	TO-18, Small aperture, Glass
C30662EH	200	2.5	850	45	45	70	0.14	10	9.3	75	Yes	TO-18, Large aperture, Glass
C30662EH-1	200	2.5	850	45	45	70	0.14	10	9.3	75	Yes	TO-18, Large aperture, Glass
C30662EH-3	200	2.5	850	45	45	70	0.14	10	9.3	75	Yes	TO-18, Small aperture, Glass
C30662L	200	2.5	850	45	45	70	0.14	10	9.3	75	Yes	SMD LLC

NOTE: The "-1" version of the C30662 series have a Vbr-Vop of >4V. Glass material is transparent for visible and IR wavelengths, while Silicon blocks visible light up to about 1.1 $\mu\text{m}$ .

# PIN Photodiodes

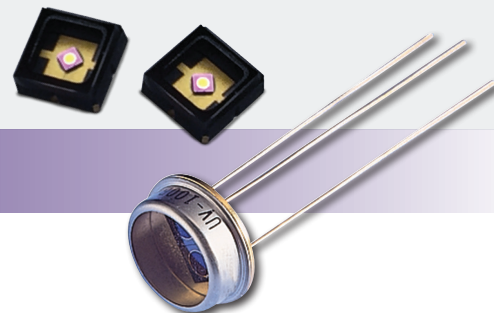

## InGaAs and Si PIN Diodes

### Applications

- Beam Rider Receiver
- Range Finding
- Training & Simulation
- Height of Burst
- Laser Proximity Sensor

### Features and Benefits

- High speed
- High responsivity
- Hermetically-sealed
- Large area available
- High shunt resistance, low dark current
- Customization available upon request

### Product Description

Silicon PIN photodiodes are available in a wide variety of active areas to accommodate a large range of applications. The PIN structure allows high quantum efficiency and fast response for detection of photons in the 400 nm to 1100 nm range.

The C30741 provides fast response and good quantum efficiency in the spectral range between 300 nm to 1100 nm. Designed for high-speed, high-volume production and cost-sensitive applications, these photodiodes are offered in plastic TO-style packages with a visible blocking filter option.

Our UV series are high quality Si PIN photodiodes in hermetically-sealed TO packages designed for the 220 nm to 1100 nm wavelength region with enhanced operation in the UV range. Low noise detection is achieved by operating the UV series in photovoltaic mode (0 V bias).

The InGaAs PIN detectors provide high quantum efficiency from 800 nm to 1700 nm. They feature low capacitance for extended bandwidth, high resistance for high sensitivity, high linearity, and uniformity within 2 % across the detector active area.

Product Table

### InGaAs PIN, High Speed, Peak Wavelength at 1550 nm

Unit	Active Diameter μm	Responsivity Peak A/W	Typical Capacitance pF	Bw GHz	Dark Current nA	Breakdown Voltage V	Operating Voltage V	Package
C30617BH	100	1.05	0.45	3.5	<1	100	5	TO-18, ball lens
C30617BFCH	100	1.05	0.45	3.5	<1	100	5	TO-18, FC receptacle
C30617BSCH	100	1.05	0.45	3.5	<1	100	5	TO-18, SC receptacle
C30617BQC-04-XX	100	1.05	0.45	3.5	<1	100	5	Pigttailed TO-18
C30617GH	100	1.05	0.45	3.5	<1	100	5	TO-18
C30617ECERH	100	1.05	0.45	3.5	<1	100	5	Ceramic carrier
C30617L-100	100	1.05	0.45	3.5	<1	100	5	SMT
C30618BFCH	350	1.05	3.7	0.75	1	100	5	TO-18, FC receptacle
C30618GH	350	1.05	3.7	0.75	1	100	5	TO-18
C30618ECERH	350	1.05	3.7	0.75	1	100	5	Ceramic carrier
C30618L-350	350	1.05	3.7	0.75	1	100	5	SMT

NOTE: Different fiber core diameter can be ordered, please contact us for more information.





# PIN

## Photodiodes

### YAG and Quadrant Detectors



## YAG-optimized and Quadrant Detectors

### Applications

- Semi-Active Laser Seeker
- Missile Guidance Systems
- Laser Spot Tracking
- Laser Warning Receivers
- Instrumentation

### Features and Benefits

- Quadrants defined with no dead zone
- Planar diffused
- Large area
- Wide dynamic range
- >50% DC quantum efficiency at 1064 nm
- 40% typical responsivity at room temperature, can reach 60% with internal heating element
- Wide spectral range
- >90% DC quantum efficiency at 900 nm
- Peak responsivity: 0.7 A/W at 1000 nm

### Product Description

Excelitas Technologies' YAG series of Silicon PIN single-element and quadrant detectors are high-performance N-type or P-type Si PIN photodiodes in hermetically sealed TO packages. These photodiodes perform well over the 400 nm to 1100 nm wavelength range, with enhanced IR responsivity, making them ideal for 1064 nm detection applications.

Designed with a guard ring to collect current generated outside of the active area, they are the detectors of choice when the entire chip is illuminated by reducing unwanted carriers responsible for noise.

Precise beam positioning can be achieved by using our quadrant detectors. They are designed with 4 pie-shaped quadrant sections created via the doping process, thus reducing the dead space between each quadrant to almost zero. Each quadrant is then connected to an isolated lead.

The YAG series offers an exceptional 0.4 A/W at 1064 nm by using a thick silicon material. While the C30665GH-4 can offer similar performance at 1064 nm and extend detection towards 1550 nm for detection of eye-safe laser range finders and designators.

The YAG series can include a resistive heater and temperature sensor within the hermetic enclosure to help further increase the responsivity at the YAG wavelength or with additional anti-reflection coating (ARC) further increasing the transmission through the front window. These options can be ordered with the -H (heater), -AR (coating) or -ARH (both features) suffix.

Recognizing that different applications have different performance requirements, Excelitas offers a wide range of customization of these photodiodes to meet your unique design challenges. Various active area, custom device testing/qualification and packaging options (hermetic metal can, high shock resistance packaging, ceramic carrier, custom pin-out configuration, heater-options, etc.) are among many of the application specific solutions available.

Product Table

### Quadrant Detectors

Unit	Description	Active Diameter mm	Active Area mm <sup>2</sup>	Capacitance per quadrant pF	Rise/Fall Time ns	Dark Current per quadrant nA	Breakdown Voltage min V	Responsivity 900 nm A/W	Responsivity 1064 nm A/W	Noise Current per quadrant pA/√Hz	Package
C30845EH	900 nm Quadrant PIN	8	50	8	6	70	100	0.6	0.17	0.26	TO-8
YAG-200-4AH	1064nm Quadrant PIN	5.1	5.1	2	12	10	200	0.6	0.5	0.1	Custom
YAG-200N-4AH	1064nm Quadrant PIN	5.1	5.1	2	12	10	200	0.6	0.5	0.1	Custom
YAG-444-4AH*	1064 nm Quadrant PIN	11.5	100	9	12	30	200	0.6	0.5	0.2	Custom
YAG-444N-4AH*	1064 nm Quadrant PIN	11.5	100	9	12	30	200	0.6	0.5	0.1	Custom
YAG-555-4AH*	1064 nm Quadrant PIN	14.1	156	12	12	50	200	0.6	0.5	0.2	Custom
YAG-555N-4AH*	1064 nm Quadrant PIN	14.1	156	12	12	50	200	0.6	0.5	0.1	Custom
C30665GH-4	1550 nm Quadrant PIN	3	7	45	5	0.5	50	0.8 @ 1064 nm	1.05 @ 1550 nm	0.06	TO-5
C30665GH-4-LC	1550 nm Quadrant PIN	3	7	20	2	0.5	50	0.6	0.5	0.06	TO-5

\* The YAG series of quadrant PIN photodiodes are available with built-in heater package, upon request.

Product Table

Single Element Detectors

Unit	Active Diameter mm	Active Area mm <sup>2</sup>	Responsivity Peak A/W	Peak Wavelength nm	Capacitance pF	Rise/Fall Time ns	Dark Current nA	Shunt Resistance MΩ	Breakdown Voltage V	Operating Voltage V	Package
YAG-100AH	2.5	5.1	0.7	1000	2.5	5	<20	-	>200	180	TO-5
YAG-200H	5	20	0.7	1000	6	5	<100	-	>200	180	TO-8
YAG-444AH	11.3	100	0.7	1000	35	5	<200	-	>200	180	Custom

NOTE: The YAG series of single-element PIN photodiodes are also available with a built-in heater or optional anti-reflection coating, upon request.

Figure 1

YAG-100AH TO-5 Package\*

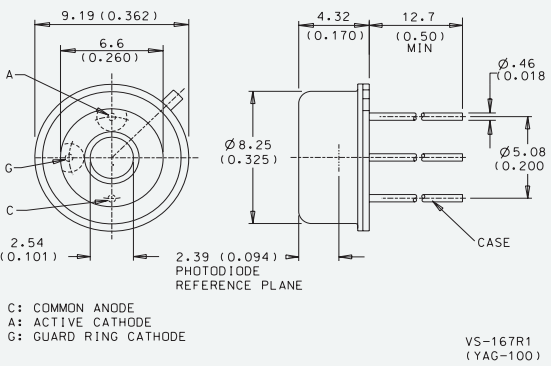


Figure 2

YAG-200H TO-8 Package\*

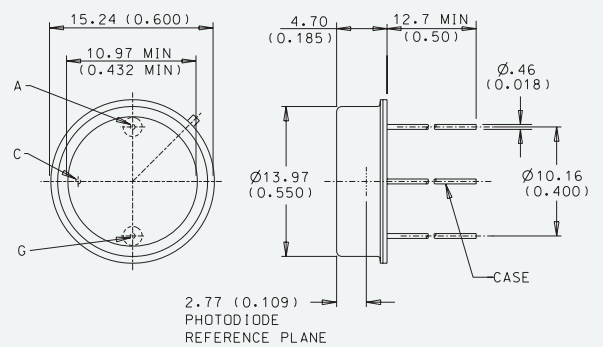


Figure 3

YAG-444AH Custom 1-inch Package\*


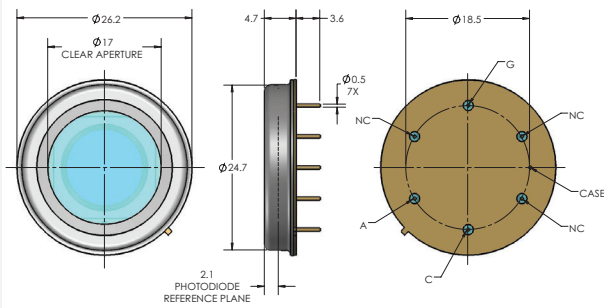


Figure 4


YAG-444-4AH Custom 1-inch Package\*

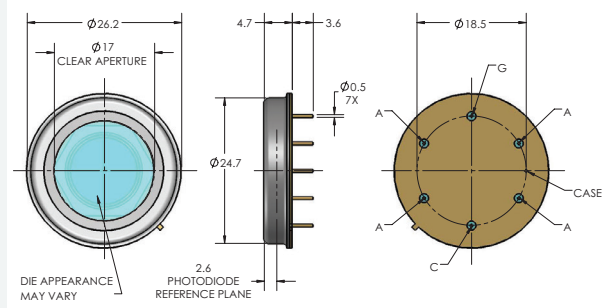

\*Note: Package dimensions for indication only. Exact package dimensions can be found on products datasheets.


Graph 1

YAG Room-temperature Spectral Responsivity

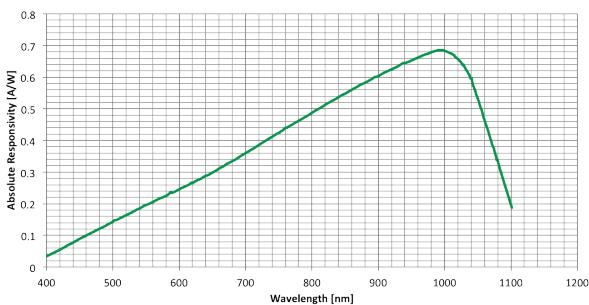


Graph 2

YAG Responsivity as a function of temperature

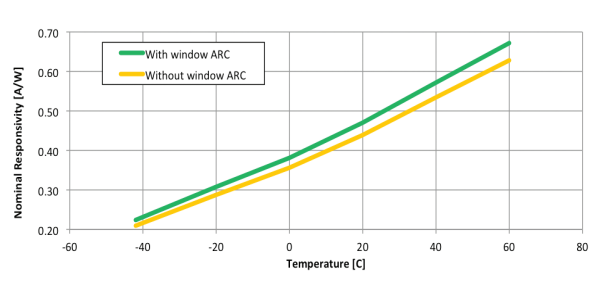

# PIN and APD Hybrid Receivers



## Si PIN and APD Modules – InGaAs APD Modules

### Applications

- Laser Range Finder
- Target Designator
- Optronics Pod
- LiDAR & LADAR
- Target Recognition
- Obstacle Avoidance Scanner

### Features and Benefits

- Ultra low noise
- High speed
- High transimpedance gain
- Customization available upon request

### Product Description

These hybrid receivers comprise of a photodetector (PIN or APD) and a transimpedance amplifier in the same hermetically-sealed package. Having both amplifier and photodetector in the same package avoids noise pickup from the surrounding environment and reduces parasitic capacitances from interconnect allowing lower noise operation.

The C30659 series includes an APD connected to a low noise transimpedance amplifier. 4 models are offered with a Silicon APD and 2 models offered with an InGaAs APD. Standard band-width of 50 MHz and 200 MHz can accommodate a wide range of applications. The C30659 models are offered with the APD mounted on a thermo-electric cooler (the LLAM series) to help improve noise or to keep the APD at constant temperature regardless of the ambient temperature.


The C30659 can be customized to meet application specific requirements by using one of the Excelitas rear entry APDs, by choosing a custom bandwidth or by qualifying it to your environmental conditions. Pigtailed versions are also available.

Both the C30659 and LLAM series have options for enhanced higher damage thresholds, thus providing greater resilience when exposed to high optical power densities. The C30950EH offers a low cost alternative to the C30659. The amplifier is designed to neutralize the input capacitance of a unity voltage gain amplifier. The C30919E uses the same architecture of the C30950EH with the addition of a high voltage temperature compensation circuit which maintain module responsivity constant over a wide temperature range.

The HUV modules are offered with a PIN detector for low frequency high gain application, covering a broad spectrum range from the UV to the near IR. All optical receiver products can be qualified to meet the most demanding environmental specification as described in MIL-PRF-38534. Space qualified options are also available.

Figure 1

### APD Receiver Responsivity vs. Wavelength

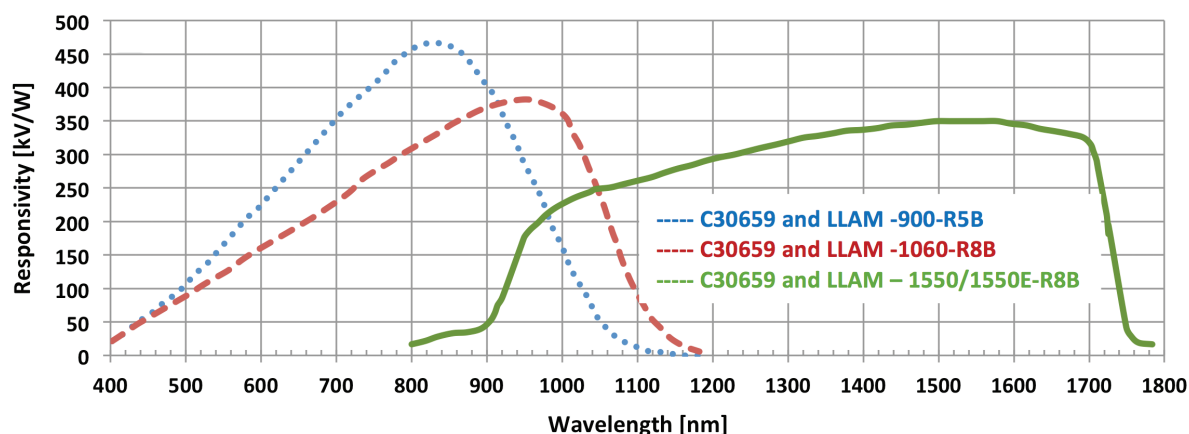

Si PIN and APD Modules – InGaAs APD Modules

Unit	Detector	Active Diameter	Bandwidth	Responsivity, 900 nm	Responsivity, 1060 nm	Responsivity, 1550 nm	NEP	Output Voltage Swing, 50 Ohm	Package
		mm	MHz	kV/W	kV/W	kV/W	fW/√Hz	V	
C30659-900-R5BH	C30902	0.5	200	400	-	-	40	0.9	TO-8
C30659-900-R8AH	C30817	0.8	50	3000	-	-	12	0.9	TO-8
C30659-1060-R8BH	C30954	0.8	200	370	200	-	100	0.9	TO-8
C30659-1060-3AH	C30956	3	50	450	280	-	90	0.9	TO-8
C30659-1550-R08BH	C30645	0.08	200	-	-	90	220	0.9	TO-8
C30659-1550E-R08BH*	C30645	0.08	200	-	-	90	220	0.9	TO-8
C30659-1550-R2AH	C30662	0.2	50	-	-	340	130	0.9	TO-8
C30659-1550E-R2AH	C30662	0.2	50	-	-	340	130	0.9	TO-8
C30950EH	C30817	0.8	50	560	140	-	27	0.7	TO-8
LLAM-1550-R08BH	C30645	0.08	200	-	-	90	220	0.9	TO-8 FLANGE
LLAM-1550E-R08BH	C30645	0.08	200	-	-	90	220	0.9	TO-8 FLANGE
LLAM-1550-R2AH	C30662	0.2	50	-	-	340	130	0.9	TO-8 FLANGE
LLAM-1550E-R2AH	C30662	0.2	50	-	-	340	130	0.9	TO-8 FLANGE
LLAM-1060-R8BH	C30954	0.8	200	370	200	-	55	0.9	TO-8 FLANGE
LLAM-1060-R8BH-FC	C30954	0.8	200	370	200	-	55	0.9	TO-8 FLANGE+FC
LLAM-1060E-R8BH*	C30954	0.8	200	370	200	-	55	0.9	TO-8 FLANGE
HPR-1100BGH	UV-100	2.5	0.001	130 MV/W	-	-	30	5 min	CUSTOM

\* "E" versions of the receivers are with enhanced damage threshold over exposure protection feature.

Figure 1

TO-8 Package for C30659 Devices\*


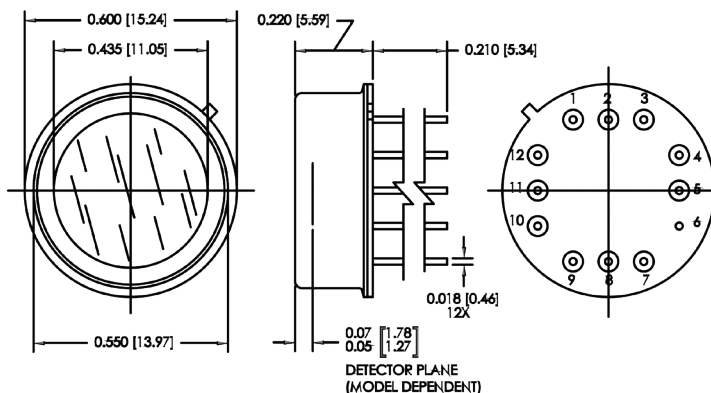


Figure 2

TO Flange Package for LLAM Devices\*




\*Note: Package dimensions for indication only. Exact package dimensions can be found on products datasheets.

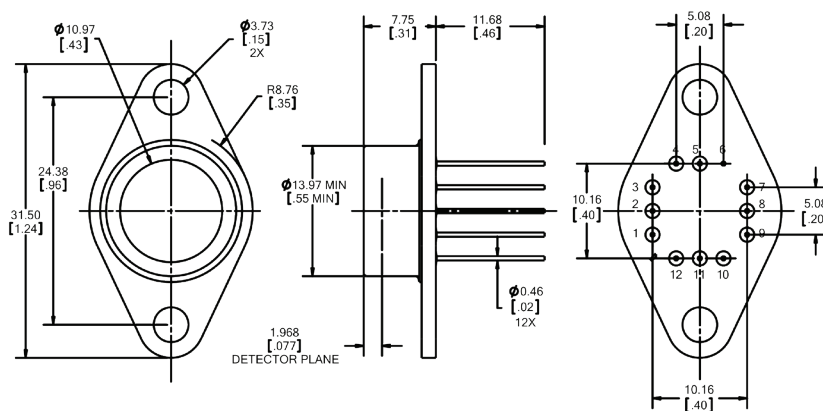

# High Power Laser Diode

For Ranging

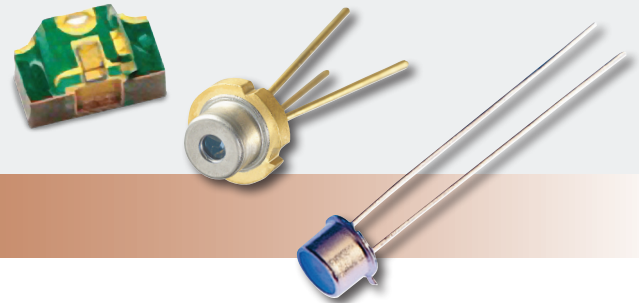

## Pulsed Laser Diodes – 905 and 1550 nm

### Applications

- Laser Range Finder
- Proximity Fuze
- Height of Burst
- Beam Rider Transmitter
- LiDAR & LADAR
- Training & Simulation

### Features and Benefits

- Multi-cavity lasers concentrate emitting source size
- Quantum well structure
- High peak pulsed power into aperture
- Excellent power stability with temperature
- Customization available upon request
- Overdriving of lasers is possible, please contact us for more information

### Product Description

Pulsed semiconductor lasers in the near IR are commonly used for long-distance time-of-flight or phase-shift range-finder or LiDAR systems. Excelitas offers a broad range of ideally-suited pulsed 905 nm laser designs including multi-cavity monolithic structures with up to 4 active areas per chip resulting in up to 100 W of peak optical output power. Physical stacking of laser chips is also possible, resulting in up to 300 W of peak optical output power.

Chip-on-board assemblies are available for hybrid integration. A selection of 6 metal, hermetically-sealed package types are available for harsh environment applications. A molded epoxy resin TO-18 type package and a surface-mount overmoulded chip-on-ceramic package are available for high-volume applications.

Critical parameters are pulse-width and rise/fall times. The pulse width may be reduced allowing for increased current drive and resulting in higher peak optical power. Quantum-well laser design offers rise and fall times of <1ns but the drive circuit lay-out and package inductance play the greater role in determining rise/fall times, and should be designed accordingly. Excelitas offers a variety of package types with different inductance values to assist to this end.

Our core competencies include: MOVPE wafer growth; wafer processing of the grown GaAs wafers; assembly using either epoxy or solder die attach; epoxy encapsulation of lasers mounted on lead frame; hermetically-sealed product qualification to MIL-STD and custom requirements.

Excelitas also offers 1550 nm (PVG series) pulsed laser diodes, please contact us for more information.


Product Table

PGA Pulsed Laser Family Selection Table, Typ. Wavelength 905 nm, 5 nm Spectral Width

Device (X = pkg) (H = RoHS Compliance)	Description		Emitting Area		Typical Peak Power at 10A, 100 ns	Typical Peak Power at 30A, 100 ns	Beam Spread Parallel to Junction (FWHM)	Beam Spread Perpendicular to Junction (FWHM)	Typical Temperature Coefficient	Preferred Packages		
	# of Chips	Total # of Emitting Stripes	Width $\mu\text{m}$	Height $\mu\text{m}$	75 $\mu\text{m}$ (3 mils) Stripe Width	225 $\mu\text{m}$ (9 mils) Stripe Width	$\Theta_{\parallel}$	$\Theta_{\perp}$	nm / °C	"S" Metal Can TO-18	"LU" High Volume Metal TO-56	"D" Epoxy Encapsulated SMT
					8 W	25 W	10	25		nm / °C	✓	✓
PGAx1S03H	1	1	75	1	8 W		10	25	0.25	✓		✓
PGAx1S09H	1	1	225	1		25 W	10	25	0.25	✓		✓
DPGAx1S03H	1	2	75	5	16 W		10	25	0.25	✓	✓	✓
DPGAx1S09H	1	2	225	5		50 W	10	25	0.25	✓		✓
TPGAx1S03H	1	3	75	10	24 W		10	25	0.25	✓	✓	✓
TPGAx1S09H	1	3	225	10		75 W	10	25	0.25	✓	✓	✓
QPGAx1S03H	1	4	75	15	30 W		10	25	0.25	✓	✓	✓
QPGAx1S09H	1	4	225	15		100 W	10	25	0.25	✓		✓
TPGAx2S03H	2	6	75	175	48 W		10	25	0.25	✓		
TPGAx2S09H	2	6	225	175		150 W	10	25	0.25	✓		
QPGAx2S03H	2	8	75	225	60 W		10	25	0.25	✓		
QPGAx2S09H	2	8	225	225		200 W	10	25	0.25	✓		
QPGAx3S03H	3	12	75	450	90 W		10	25	0.25	✓		
QPGAx3S09H	3	12	225	450		300 W	10	25	0.25	✓		


Graph 1

Peak Radiant Intensity vs. Temperature

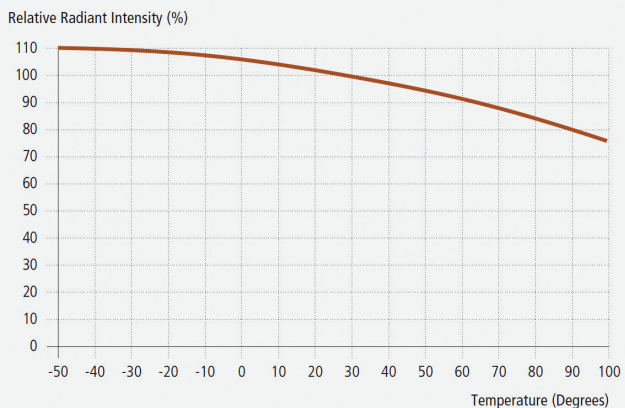


Graph 4

Radiant Intensity vs. Pulse Width for Safe Operation

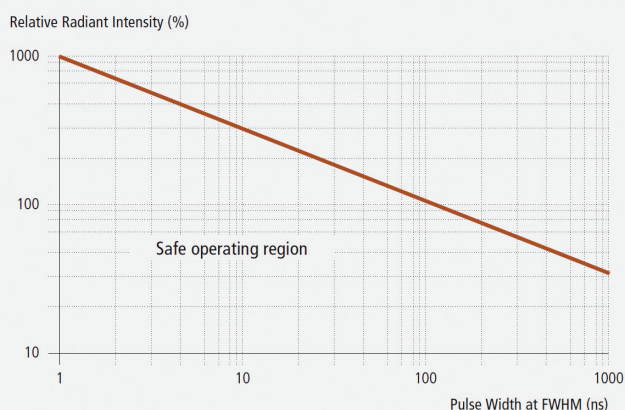

Graph 3

Spectral Plot Distribution

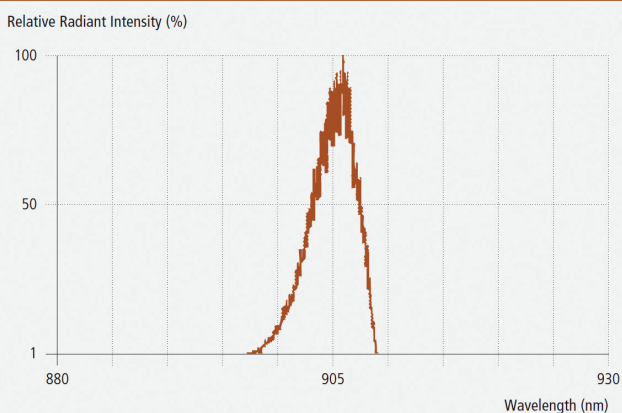

Graph 6

Center Wavelength vs. Temperature



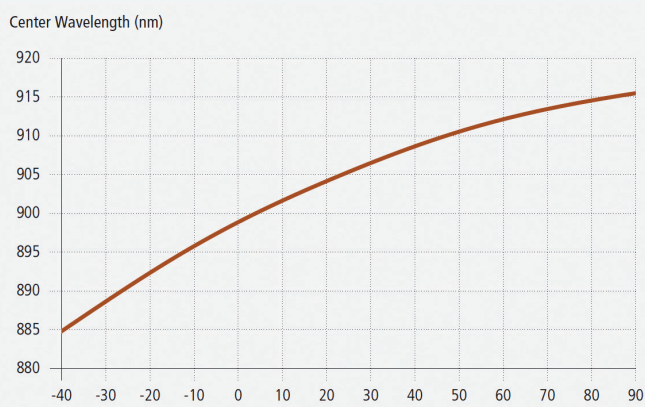


Figure 1

Package S Drawing \*

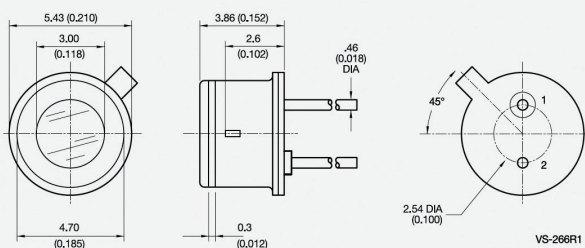


Package S (TO-18)




Pin out  
 1. LD Anode (+),  
 2. LD Cathode (-) Case,  
 Inductance 5.2 nH

Figure 2

Package D Drawing \*

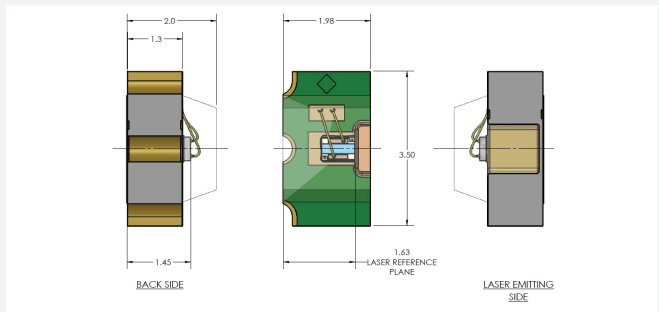

Package D (Surface Mount)




Inductance 1.6 nH


\*Note: Package dimensions for indication only. Exact package dimensions can be found on products datasheets.

Figure 2

Package U Drawing\*

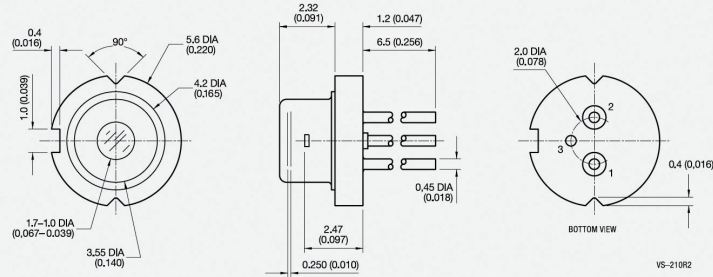


Package U (5 mm CD)




Pin out  
 1. LD Anode (+),  
 2. NC,  
 3. LD Cathode (-) Case,  
 Inductance 5.0nH

Figure 3

Package Y Drawing • Laser Chip on Board

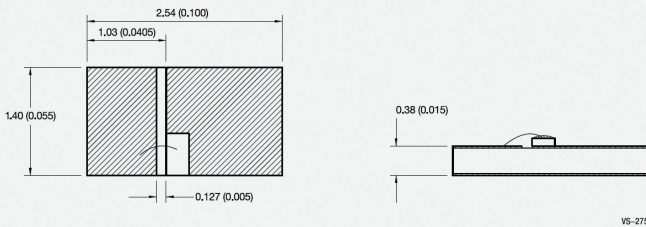


Package Y (Chip on Carrier)



Pin out  
 1. LD Cathode (-) chip bottom,  
 2. LD Anode (+) chip top,  
 Inductance 1.6nH

Figure 4

Package C Drawing\*

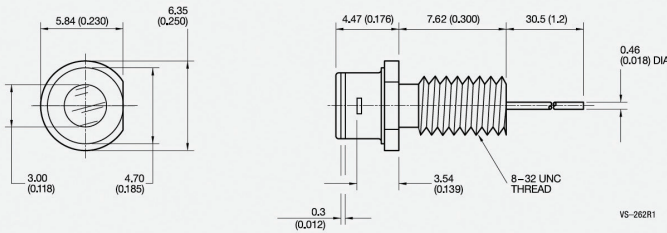


Package C (8-32 Coax)




Pin out  
 1. LD Anode (+),  
 2. LD Cathode (-) Case,  
 Inductance 12 nH

Figure 5

Package R Drawing\*

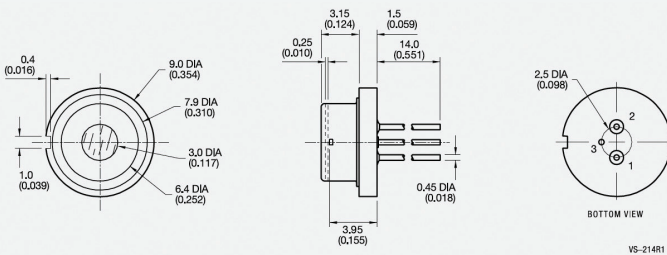


Package R (9 mm CD)



Pin out  
 1. LD Anode (+),  
 2. NC,  
 3. LD Cathode (-) Case,  
 Inductance 6.8nH

Figure 6

Package W Drawing • Plastic Package (1S Devices Only)\*

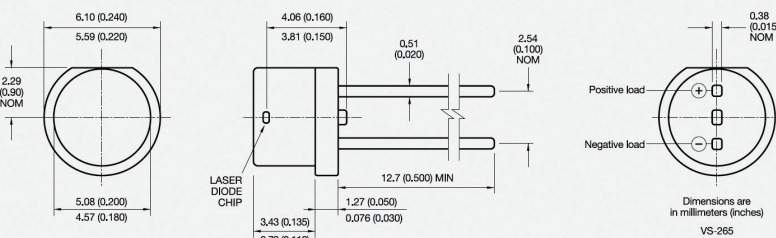


Package W (TO-18 Plastic)



Pin out  
 1. (Pkg Flat) LD Anode (+),  
 2. LD Cathode (-),  
 Inductance 5.0nH

\*Note: Package dimensions for indication only. Exact package dimensions can be found on products datasheets.

# Detectors for Laser Warning Systems

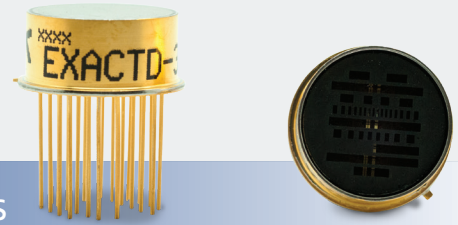

## EXACTD-332 or -362 – Detectors for Laser Warning Systems

### Applications

- Laser Warning Receiver Systems
- Position Determining Systems
- Direction Aids

### Features and Benefits

- Spectral sensitivity range of 500 – 1650 nm
- $\pm 3$  or  $0.8^\circ$  AoA accuracy - in either azimuth or elevation
- FOV is  $\pm 45^\circ$  for both azimuth and elevation angles.
- Low- and High-sensitivity channels for wide dynamic range

### Product Description

Excelitas' EXACTD-332 or -362 detectors are designed for use in Laser Warning Receiver Systems to detect and provide precise angle-of-arrival (AoA) information of incident light emitted by laser range finders, laser target designators, and active laser Electro-Optic (E.O.) systems.

The modules make use of 5 or 9 element Si and InGaAs detector arrays assembled in a sandwich configuration, in conjunction with light guides and a 3 or 6-bit digital Gray code mask which, through shadowing of the individual channels, encode the incident laser beam AoA into a digital pattern. Figure 1 illustrates the Principle of Operation with only four channels (bits) without any reference channels. Figure 2 shows the overall spectral responsivity of the sandwiched Silicon and InGaAs detector elements, resulting in a combined spectral sensitivity range of 500 - 1650 nm. While Figure 3 shows the mechanical characteristics of the compact module.

Each module features two isolated arrays providing individual High- and Low- sensitivity channels. The first array exhibits high quantum efficiency over the full wavelength range, while the signal in the second array is attenuated by about 15 dB, further extending the dynamic range for detection of high power laser pulses. The module's field-of-view (FoV) is  $\pm 45^\circ$  for both azimuth (horizontal plane) and elevation (vertical plane) angles. The Gray code designs allow encoding of incident AoA with an angular resolution of  $\pm 3$  or  $0.8^\circ$ , in either azimuth or elevation, depending on the module's orientation. Three reference channels, illuminated for all incident angles, are provided in each array for baseline signal level determination.

Figure 1 - Principle of Operation

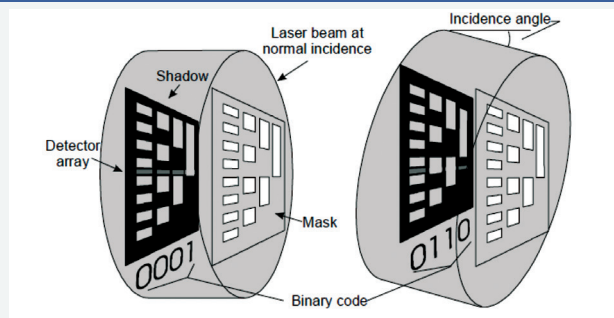


Figure 3 - Mechanical Characteristics\*


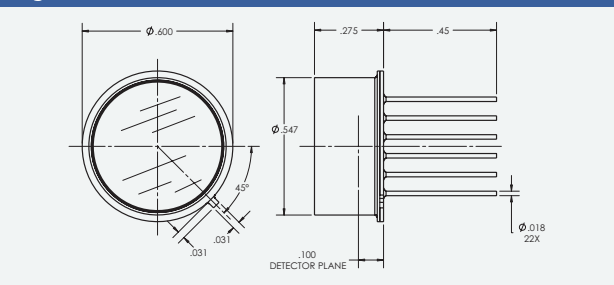


Figure 2 - Typical Responsivity



\*Note: Package dimensions for indication only. Exact package dimensions can be found on product datasheets.

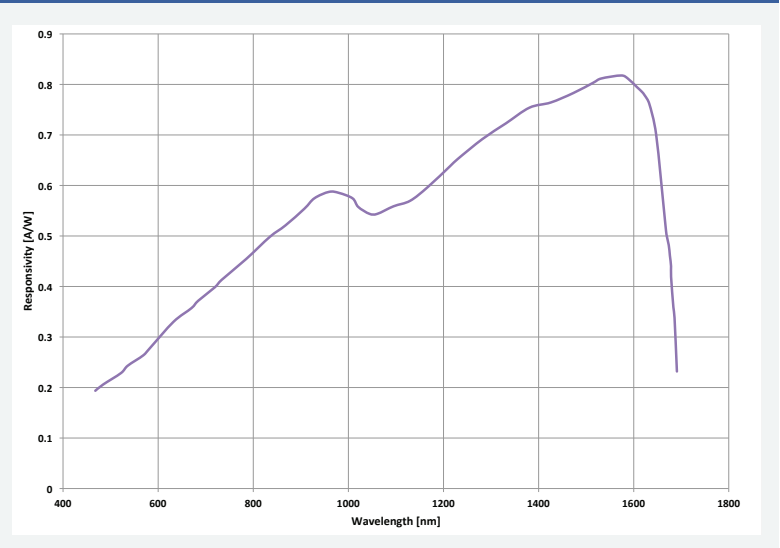

## Excelitas Technologies – Defense and Aerospace Solutions

### Solutions for Your Projects


- Power Supplies
- Energetics Modules
- Electronic Safe, Arm and Fire (ESAF) Modules
- Missile Domes
- Spark Gaps
- Sensors/Optics Components
- Rubidium Atomic Frequency Standard (RAFS)


### Please Reach Out to Us

Learn more about our other offerings which can enable you to deliver high-quality mission-critical subsystems.

- ESAF, ESAD
- Power Supplies
- Safe LEEFI Detonator: the Blue Chip®
- Shock Hardened LEEFI Detonator for Tandem Charge

- Dome
- Quadrant Photodiode and Lense for Semi-Active Laser Terminal Guidance
- Optics for Seeker Head
- Camera Modules
- Laser Diodes, Photodiodes and Lenses for Proximity Sensor

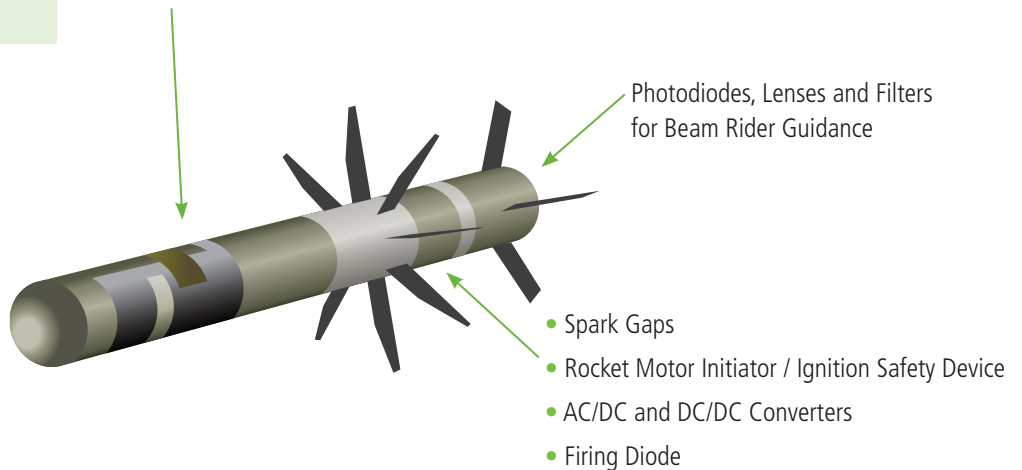

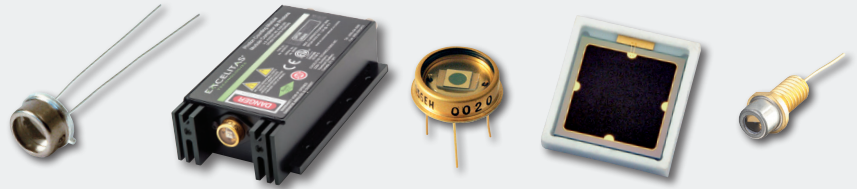

## Excelitas Technologies – Photon Detection Solutions

### Markets & Applications

#### *Life Sciences & Analytical*

- Luminescence and fluorescence for analytical and clinical diagnostics
- Photon counting
- Particle sizing
- PET, CT, MRI scanning

#### *Safety & Security*

- X-ray scanning of luggage, cargo & food
- LiDAR for autonomous vehicles and drones
- Smoke and particle detection
- Safety curtains

#### *High Volume Electronics*

- Laser range finding, industrial and consumer
- Vital signs monitoring for wearables
- Gesture recognition
- Light detection and measurement

### ***Engage, Enable, Excel.***

Everything we do revolves around this important principle. We work from Engineer to Engineer to understand your needs and tailor our solutions to exceed these needs and enable you to excel in what you do best.

Excelitas offers a complete suite of solutions for your detection needs, from individual components to plug and play modules. Our products range from high volume C30737 series of avalanche photodiodes (APDs) for range finding, to our high performance C30902 series of reach through APDs, to our outstanding single photon counting module, to pulsed laser diodes, and everything in between.

With more than 50 years of market leading performance in silicon and InGaAs detection capabilities, Excelitas offers proven expertise in customizing to specific needs and help bring your next generation platforms to market. Whether you are working in the UV, visible or near IR, or even looking to detect X-ray or Gamma rays, we have the knowledge and solutions that will help get you to market faster. Excelitas offers one-stop shopping capabilities for both detectors and emitters for those looking to develop range finding or LiDAR-based systems, which helps to simplify the supply chain and provide economies of scale. We are fully vertically integrated giving us maximum flexibility in product design at competitive pricing. Contact us to find out more on how we can help you succeed.



## About Excelitas Technologies

Excelitas Technologies® Corp. is a leading industrial technology manufacturer focused on delivering innovative, market-driven photonic solutions to meet the illumination, optical, optronic, sensing, detection and imaging needs of our OEM and end-user customers. Serving a vast array of applications across biomedical, scientific, semiconductor, industrial manufacturing, safety, security, consumer products, defense and aerospace sectors, Excelitas stands committed to enabling our customers' success in their many various end-markets. Our team consists of more than 7,500 professionals working across North America, Europe and Asia, to serve customers worldwide.

[www.excelitas.com/DefenseSensors](http://www.excelitas.com/DefenseSensors)

**Excelitas Technologies**  
22001 Dumberry Road  
Vaudreuil-Dorion, Quebec  
Canada J7V 8P7  
Telephone: (+1) 450.424.3300  
Toll-free: (+1) 800.775.6786  
Fax: (+1) 450.424.3345



---

For a complete listing of our global offices, visit [www.excelitas.com/locations](http://www.excelitas.com/locations)

© 2024 Excelitas Technologies Corp. All rights reserved. The Excelitas logo and design are registered trademarks of Excelitas Technologies Corp. All other trademarks not owned by Excelitas Technologies or its subsidiaries that are depicted herein are the property of their respective owners. Excelitas reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.

AES-DS\_CA-Photon Detection Solutions-Defense\_2024.01-REV-1.2